


**TLS 247**

MINI-TELEPHONE WITH DTMF DIALLING




**LELAS**



- **COMPACT**
- **POWERFUL**
- **PROGRAMMABLE**
- **WEATHERPROOF**
- **ROBUST**

OPTIONS REMOTE COMMAND AND REMOTE CONTROL




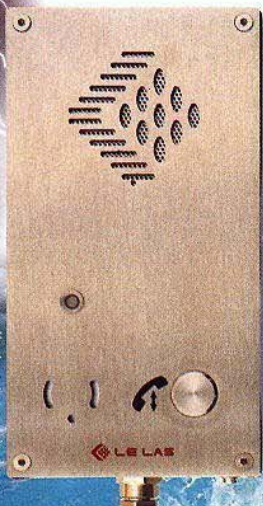

## DESCRIPTION

Weatherproof stainless-steel face-plate, vandal-resistant, comprising

- Loudspeaker.
- Microphone.
- On-line reassurance indicator.
- 1 or 2 call buttons.
- Programmable electronic card.
- With or without semi-weatherproof zinc-treated steel backing-case.

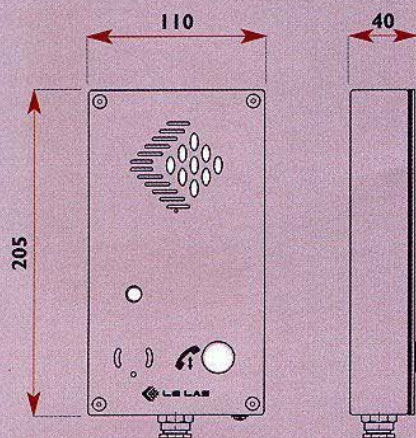

Specially designed to be fitted into the smallest spaces (lifts, locks, doorways, entry posts, etc), the new range of MINIPHONE telephone help-points, is the result of all the experience gained by LELAS in flushfitting industrial telephones.

The different versions available provide the most cost-effective product and most suitable for each requirement.

This telephone offers the choice of 1 or 2 automatic multi-autodial buttons, very easily programmed, locally or remotely. Its memory is non-volatile.

Operates on lines with weak current (guaranteed down to 18 mA)

## CHARACTERISTICS

### DTMF TELEPHONE

up to 8 numbers in memory

conforms to CCITTQ23 recommendations

Option : Telemaintenance station

Approved in UK (BABT no. 504612) and in France (ART np. 98656P)

## PARAMETERS

Ringing Tone : level, number of rings prior to answer

Validation time for press on button(s)

Reception volume

Telephone test

Duration of communication prior to automatic cleardown

Timing between alternative number autodial attempts

Caller ID

Duration of silence before cleardown

Remote cleardown code

## OPTIONS

Maintenance station

Memory contents check

Verification and modification of programming

MODEL	DESIGNATION	REFERENCE			
Surface-Mounted	Semi-weatherproof Miniphone	1 button	TLS 247 S1S	T*	G**
		2 buttons	TLS 247 S2S	T*	G**
Flushfitting	Miniphone without backing-case	1 button	TLS 247 S1SX	T*	G**
		2 buttons	TLS 247 S2SX	T*	G**
Kit	Miniphone	1 button	TLS 247 K1S	T*	G**
		2 buttons	TLS 247 K2S	T*	G**
*T = <b>TELEMAINTENANCE</b> OPTION ** G = <b>RELAY</b> OPTION					

BABT Approved for connection to public network n° 504612



Agréé ART - Conforme à la normalisation CE



Supplied by: Infocom Systems

Melbourne House, 119 Surrenden Road, Brighton, BN1 6WB, UK

Tel: +44 1273 593300, email: info@infocomsystems.co.uk