



**TLS 376/245**

HANDS FREE TELEPHONES

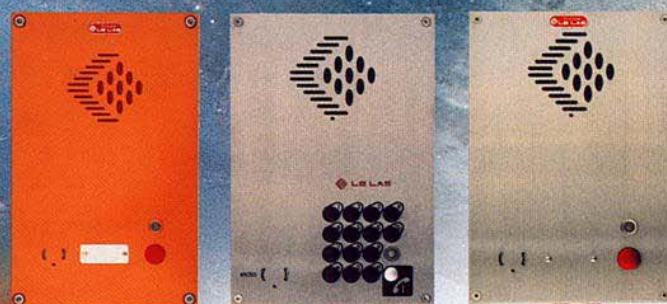

**LE LAS**

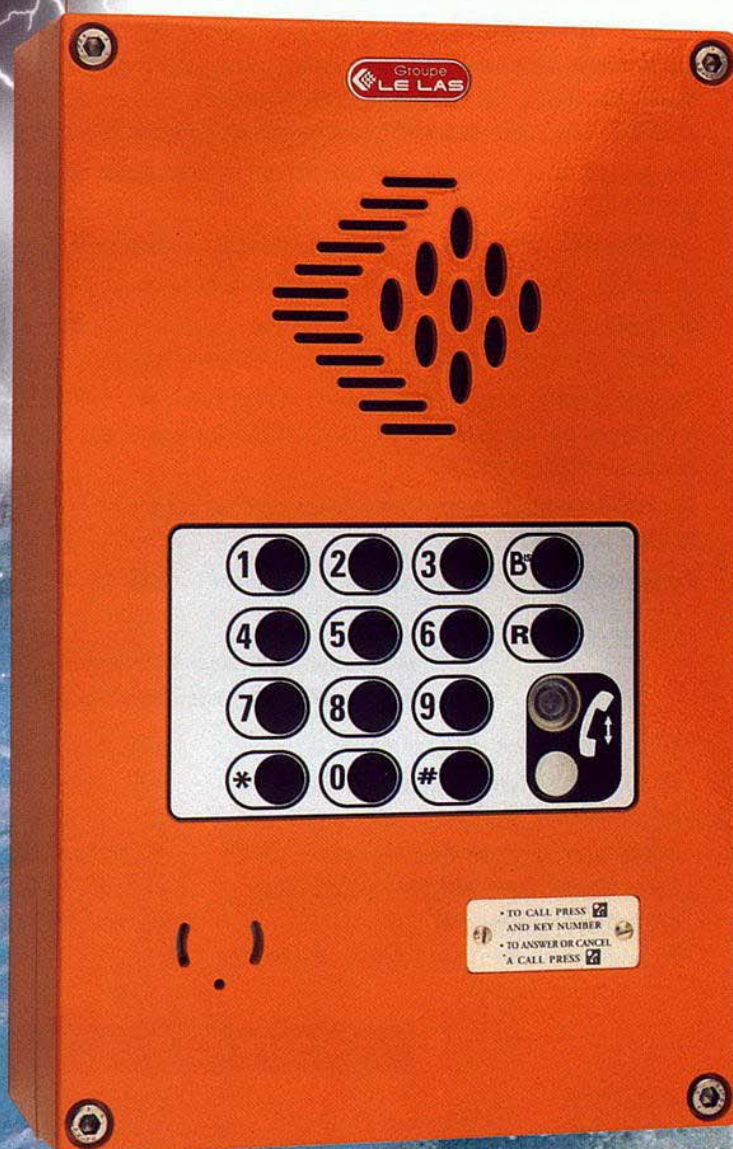

- WEATHERPROOF
- PROGRAMMABLE
- EASY TO USE

■ ROBUST


OPTIONS - REMOTE CONTROL - TELEMANTENANCE






### Type 376 : Weatherproof wallmount model

- Vandal resistant surface mount case, cast aluminium, protected by "Epikote" paint (weatherproof IP 66 when sealed), with hinged detachable front-section
- Corrosion proof hollow hexagonal retention screws ( or optionally triangular head screws
- 3 apertures for cable entries with sets of plugs and adaptors

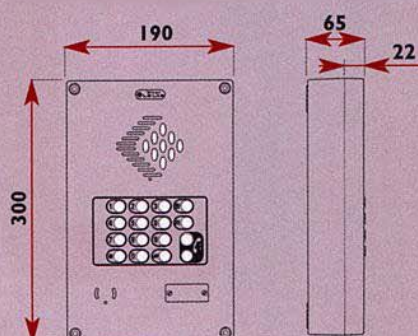

### Type 245 S : Flushfitting model

- Stainless steel faceplate for flush fitting ( weatherproof IP 55)
- Semi-weatherproof steel backing case. Hollow hexagonal screws. Cable entry via adjustable aperture.

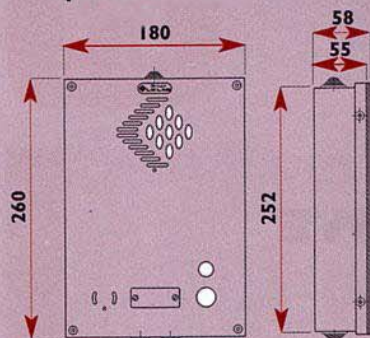

The new range of LE LAS hands-free telephones exploits the most recent technological advances: it offers a high level of flexibility and ease of use thanks to the latest microprocessor technology. ( Detection of variable programmable tones from 300 to 500 Hz) - Also operates on lines with reduced current ( guaranteed down to 18 mA )- Exceptionally robust enclosures ( industrial type) - Increased weatherproofing thanks to recently adopted techniques.

These models assure any communication, even on the most exposed site: risk of shock, vandalism, dust, corrosion, and noise ( option for noisy environment: amplifier to increase sound volume by 10 dB ).

These telephones can equally well be connected with all of the LE LAS range of accessories ( flasher, sounder, etc ).

The different versions available satisfy all user requirements for the lowest cost level:

- keypad model ( with optionally a protective flap with restricted access to dialling)
- model with 1, 2, 4 or 8 call buttons with the option of remote control relay equipment ( door entry, video surveillance, public address)

All these models can be supplied with the remote diagnostics option providing remote control, using a simple DTMF telephone, or preferably using computer software ( under Windows ref TCT 162 P)

These models can be supplied with LE LAS range of call- pillars type TLB 353, TLB 365 and TLB 376.

Approved in UK - and in France ART No 98656P.

## CHARACTERISTICS

- Telephone line driven
- On-line reassurance indicator
- Weatherproof loudspeaker, volume 78 dB
- Weatherproof Electret microphone
- Weatherproof protected pushbutton keypad
- Electronic card with microprocessor with memory back-up and lightning protection
- Programmable ringing tone , loudspeaker output volume, adjustable microphone sensitivity, duration of conversation before automatic clear-down, alternative preprogrammed autodial numbers, ID numbers, remote clear-down via transmission of a code, etc.

## OPTIONS

WEATHERPROOF WALLMOUNTED MODEL	FLUSHFITTING MODEL	OPTIONS			
TLS 376 E1S	TLS 245 S1S	T*	G**	A***	1 call button, 8 numbers
TLS 376 E1S2	TLS 245 S1S2	T*	G**	A***	2 call buttons, 8 numbers
TLS 376 E1C4	-	T*	G**	A***	4 call buttons, 8 numbers
TLS 376 E1C8	TLS 245 S1C8	T*	G**	A***	8 call buttons, 8 numbers
TLS 376 E1CL	TLS 245 S1CL	T*	G**	A***	15 button-keypad
TLS 376 E3N1CL	-	T*	G**	A***	Keypad + flap
*T = REMOTE CONTROL OPTION - ** G = RELAY OPTION - ***A = AMPLIFIER OPTION					



Agréé ART - Conforme à la normalisation CE

BABT Approved for connection to public network n° 504612

Supplied by: Infocom Systems

Melbourne House, 119 Surrenden Road, Brighton, BN1 6WB, UK  
Tel: +44 1273 593300, email: info@infocomsystems.co.uk

